


Quarter Volume Rule

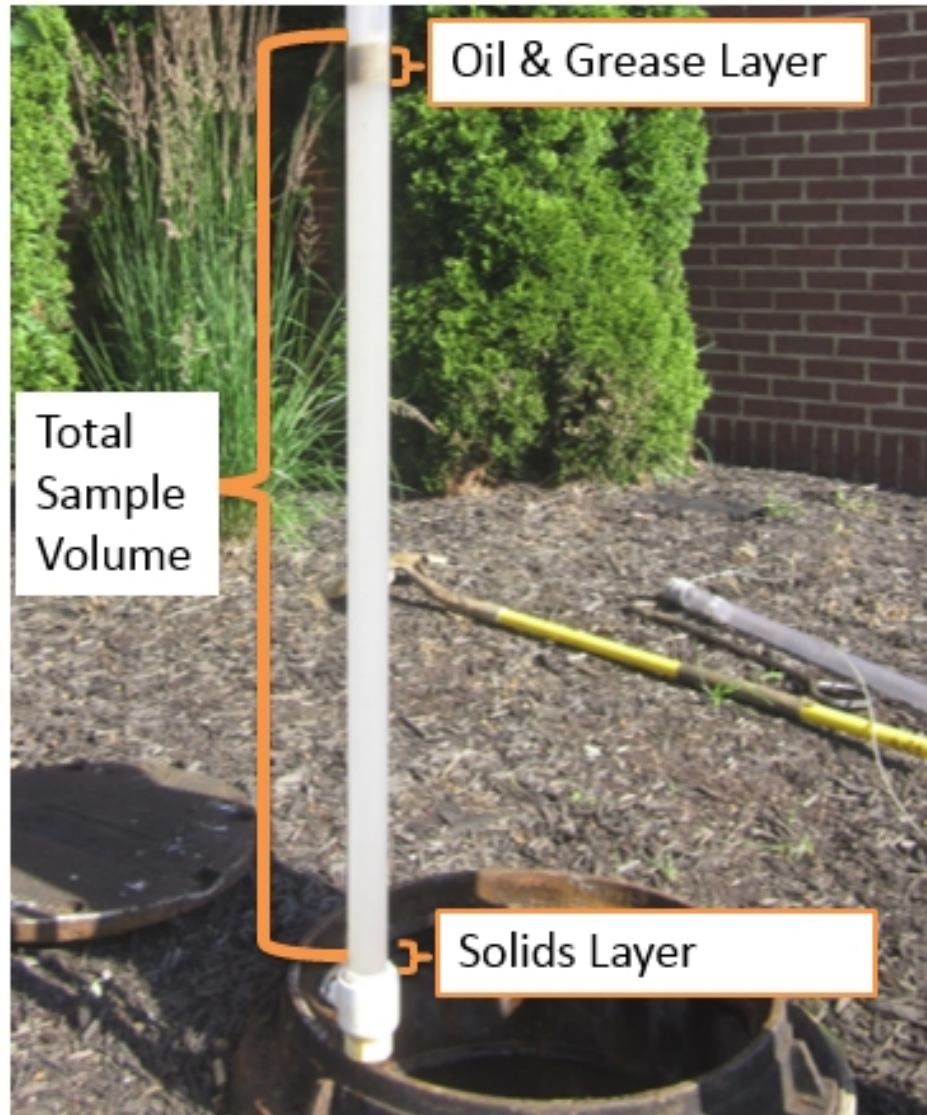

Basic Cost effective monitoring

The sludge judge, a hollow tube sampler, provides an accurate cross section profile of the Grease Interceptor. If the total combined volume of the oil & grease layer and the solids layer is less than $\frac{1}{4}$ of the total volume of the sample, then the grease interceptor inspection is considered passing.

PASS